


# Spread Spectrum

# Spread Spectrum

- ❑ Input is fed into a channel encoder
  - Produces analog signal with narrow bandwidth
- ❑ Signal is further modulated using sequence of digits
  - Spreading code or spreading sequence
  - Generated by pseudonoise, or pseudo-random number generator
- ❑ Effect of modulation is to increase bandwidth of signal to be transmitted
- ❑ On receiving end, digit sequence is used to demodulate the spread spectrum signal
- ❑ Signal is fed into a channel decoder to recover data

# Spread Spectrum

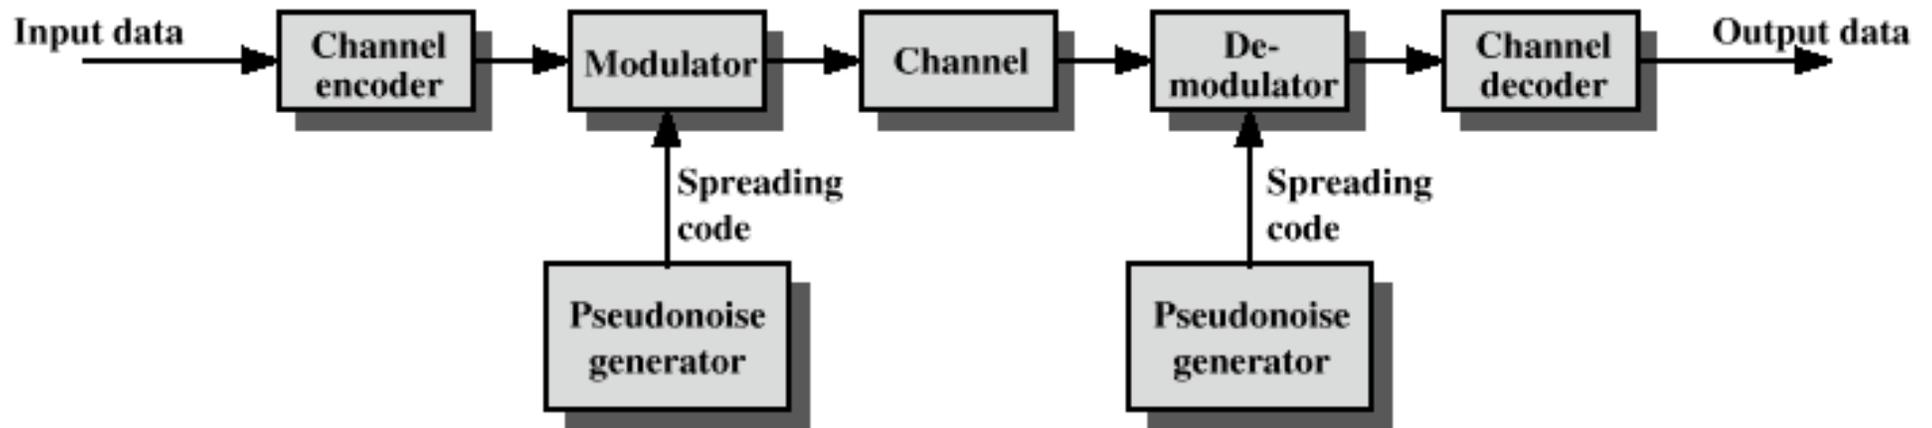

**Figure 7.1 General Model of Spread Spectrum Digital Communication System**

# Spread Spectrum

- What can be gained from apparent waste of spectrum?
  - Immunity from various kinds of noise and multipath distortion
  - Can be used for hiding and encrypting signals
  - Several users can independently use the same higher bandwidth with very little interference

# Frequency Hopping Spread Spectrum (FHSS)

- ❑ Signal is broadcast over seemingly random series of radio frequencies
  - A number of channels allocated for the FH signal
  - Width of each channel corresponds to bandwidth of input signal
- ❑ Signal hops from frequency to frequency at fixed intervals
  - Transmitter operates in one channel at a time
  - Bits are transmitted using some encoding scheme
  - At each successive interval, a new carrier frequency is selected

# Frequency Hopping Spread Spectrum

- ❑ Channel sequence dictated by spreading code
- ❑ Receiver, hopping between frequencies in synchronization with transmitter, picks up message
- ❑ Advantages
  - o Eavesdroppers hear only unintelligible blips
  - o Attempts to jam signal on one frequency succeed only at knocking out a few bits

# Frequency Hopping Spread Spectrum

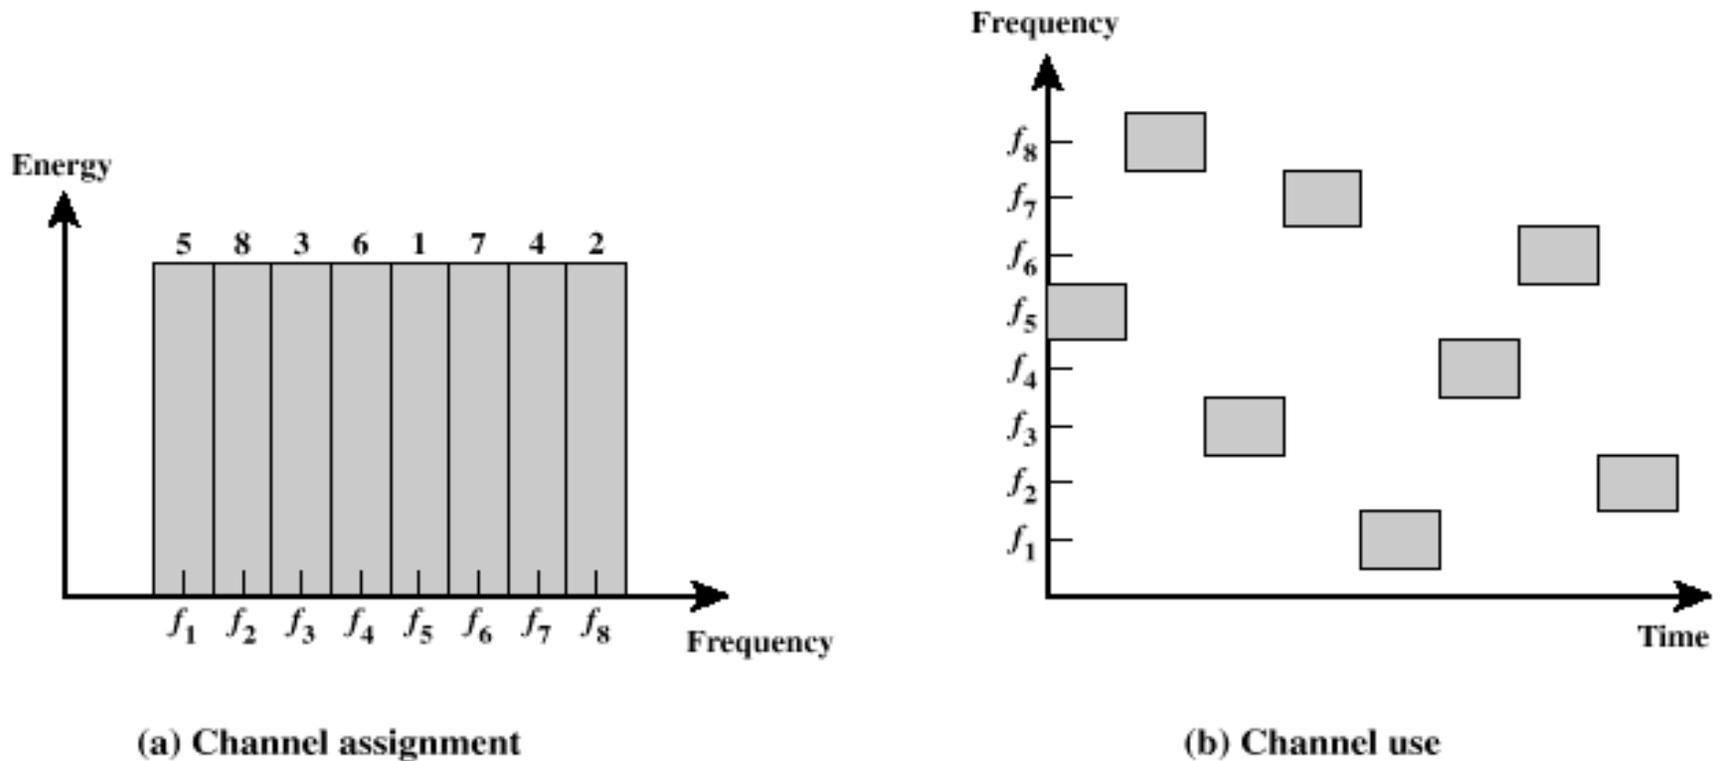


Figure 7.2 Frequency Hopping Example

# FHSS Using MFSK


- ❑ MFSK signal is translated to a new frequency every  $T_c$  seconds by modulating the MFSK signal with the FHSS carrier signal
- ❑ For data rate of  $R$ :
  - o duration of a bit:  $T = 1/R$  seconds
  - o duration of signal element:  $T_s = LT$  seconds
- ❑  $T_c \geq T_s$  - slow-frequency-hop spread spectrum
  - o Cheaper to implement but less protection against noise/jamming
  - o Popular technique for wireless LANs
- ❑  $T_c < T_s$  - fast-frequency-hop spread spectrum
  - o More expensive to implement, provides more protection against noise/jamming

# FHSS Performance Considerations

- ❑ Large number of frequencies used
- ❑ Results in a system that is quite resistant to jamming
  - Jammer must jam all frequencies
  - With fixed power, this reduces the jamming power in any one frequency band

# Direct Sequence Spread Spectrum (DSSS)

- ❑ Each bit in original signal is represented by multiple bits in the transmitted signal
- ❑ Spreading code spreads signal across a wider frequency band
  - Spread is in direct proportion to number of bits used
- ❑ One technique combines digital information stream with the spreading code bit stream using exclusive-OR

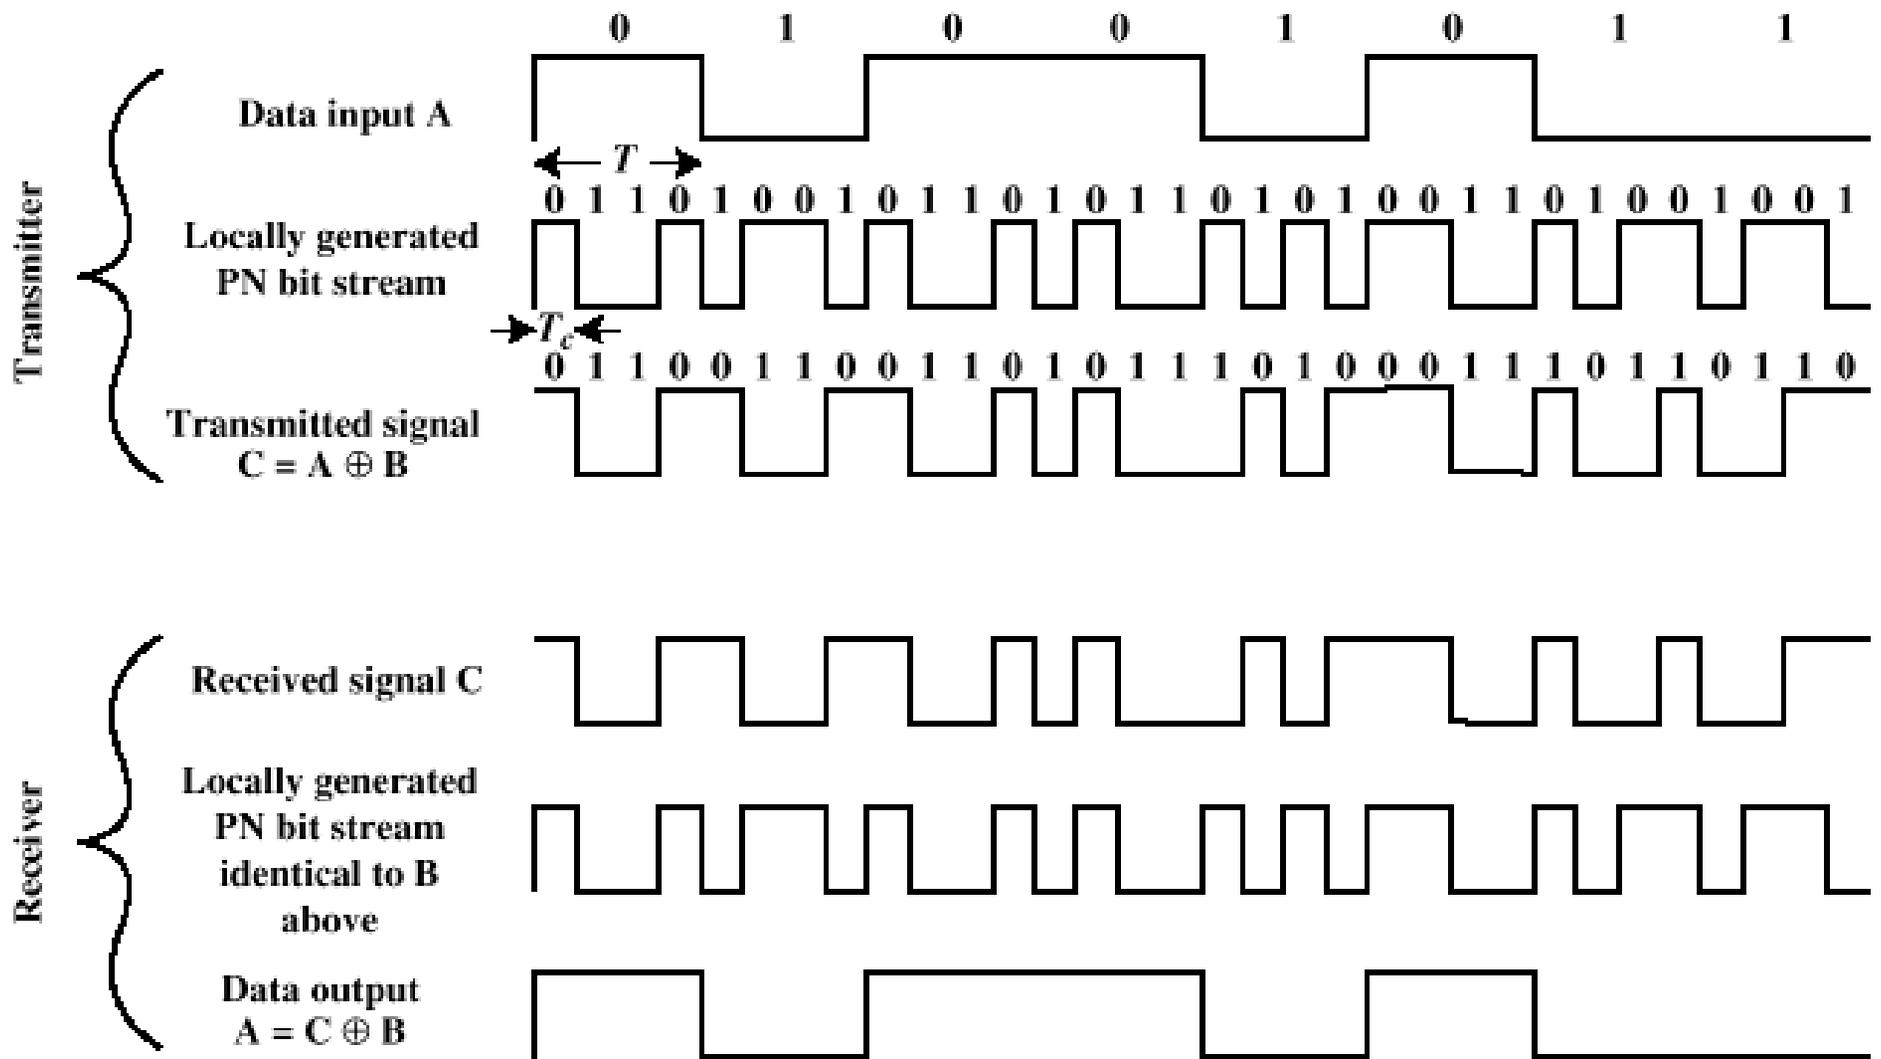

**Figure 7.6 Example of Direct Sequence Spread Spectrum**

# DSSS Using BPSK

□ Multiply BPSK signal,

$$s_d(t) = A d(t) \cos(2\pi f_c t)$$


by  $c(t)$  [takes values +1, -1] to get

$$s(t) = A d(t)c(t) \cos(2\pi f_c t)$$


- $A$  = amplitude of signal
- $f_c$  = carrier frequency
- $d(t)$  = discrete function [+1, -1]

□ At receiver, incoming signal multiplied by  $c(t)$

- o Since,  $c(t) \times c(t) = 1$ , incoming signal is recovered

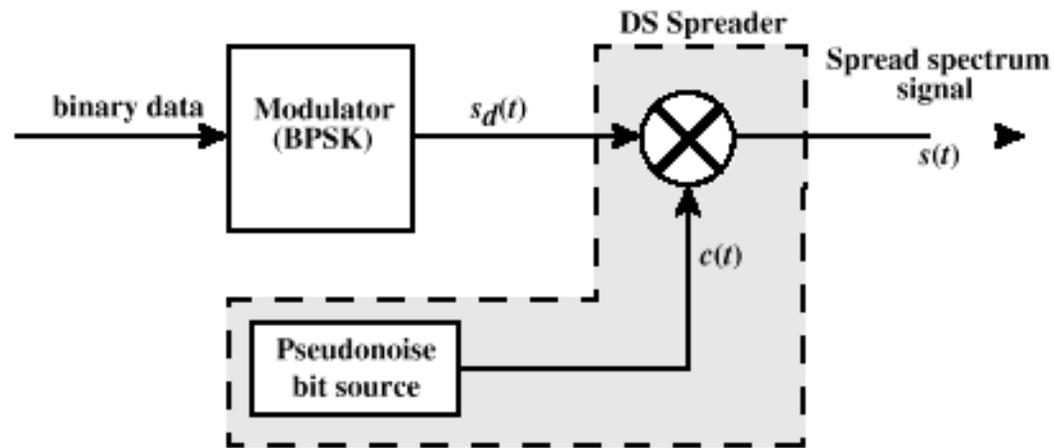

(a) Transmitter

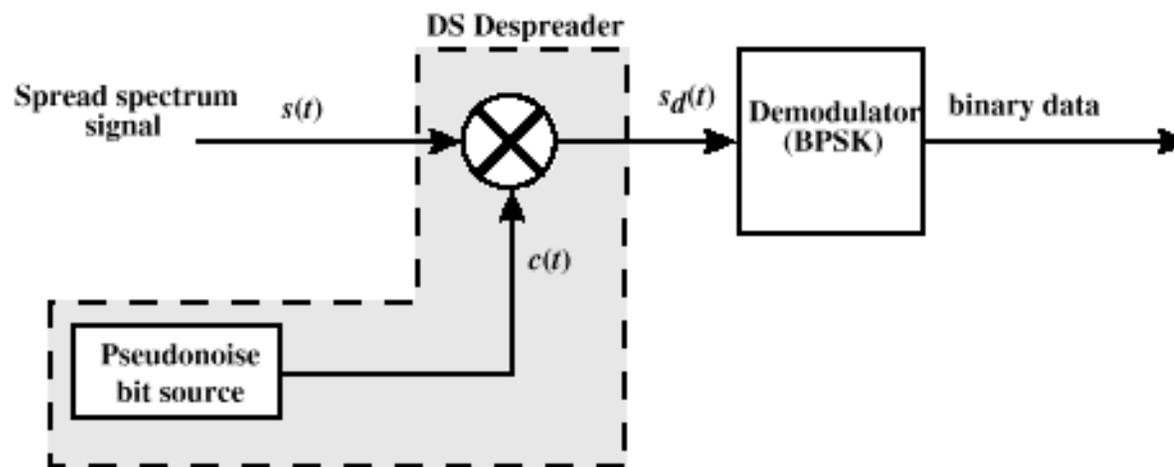

(b) Receiver

**Figure 7.7 Direct Sequence Spread Spectrum System**

# Code-Division Multiple Access (CDMA)

## □ Basic Principles of CDMA

- o  $D$  = rate of data signal
- o Break each bit into  $k$  chips
  - Chips are a user-specific fixed pattern
- o Chip data rate of new channel =  $kD$

# CDMA Example


- If  $k=6$  and code is a sequence of 1s and -1s
  - o For a '1' bit, A sends code as chip pattern
    - $\langle c_1, c_2, c_3, c_4, c_5, c_6 \rangle$
  - o For a '0' bit, A sends complement of code
    - $\langle -c_1, -c_2, -c_3, -c_4, -c_5, -c_6 \rangle$
- Receiver knows sender's code and performs electronic decode function

$$S_u(d) = d_1 \times c_1 + d_2 \times c_2 + d_3 \times c_3 + d_4 \times c_4 + d_5 \times c_5 + d_6 \times c_6$$

- o  $\langle d_1, d_2, d_3, d_4, d_5, d_6 \rangle =$  received chip pattern
- o  $\langle c_1, c_2, c_3, c_4, c_5, c_6 \rangle =$  sender's code

# CDMA Example

- User A code =  $\langle 1, -1, -1, 1, -1, 1 \rangle$ 
  - To send a 1 bit =  $\langle 1, -1, -1, 1, -1, 1 \rangle$
  - To send a 0 bit =  $\langle -1, 1, 1, -1, 1, -1 \rangle$
- User B code =  $\langle 1, 1, -1, -1, 1, 1 \rangle$ 
  - To send a 1 bit =  $\langle 1, 1, -1, -1, 1, 1 \rangle$
- Receiver receiving with A's code
  - (A's code) x (received chip pattern)
    - User A '1' bit: 6 -> 1
    - User A '0' bit: -6 -> 0
    - User B '1' bit: 0 -> unwanted signal ignored

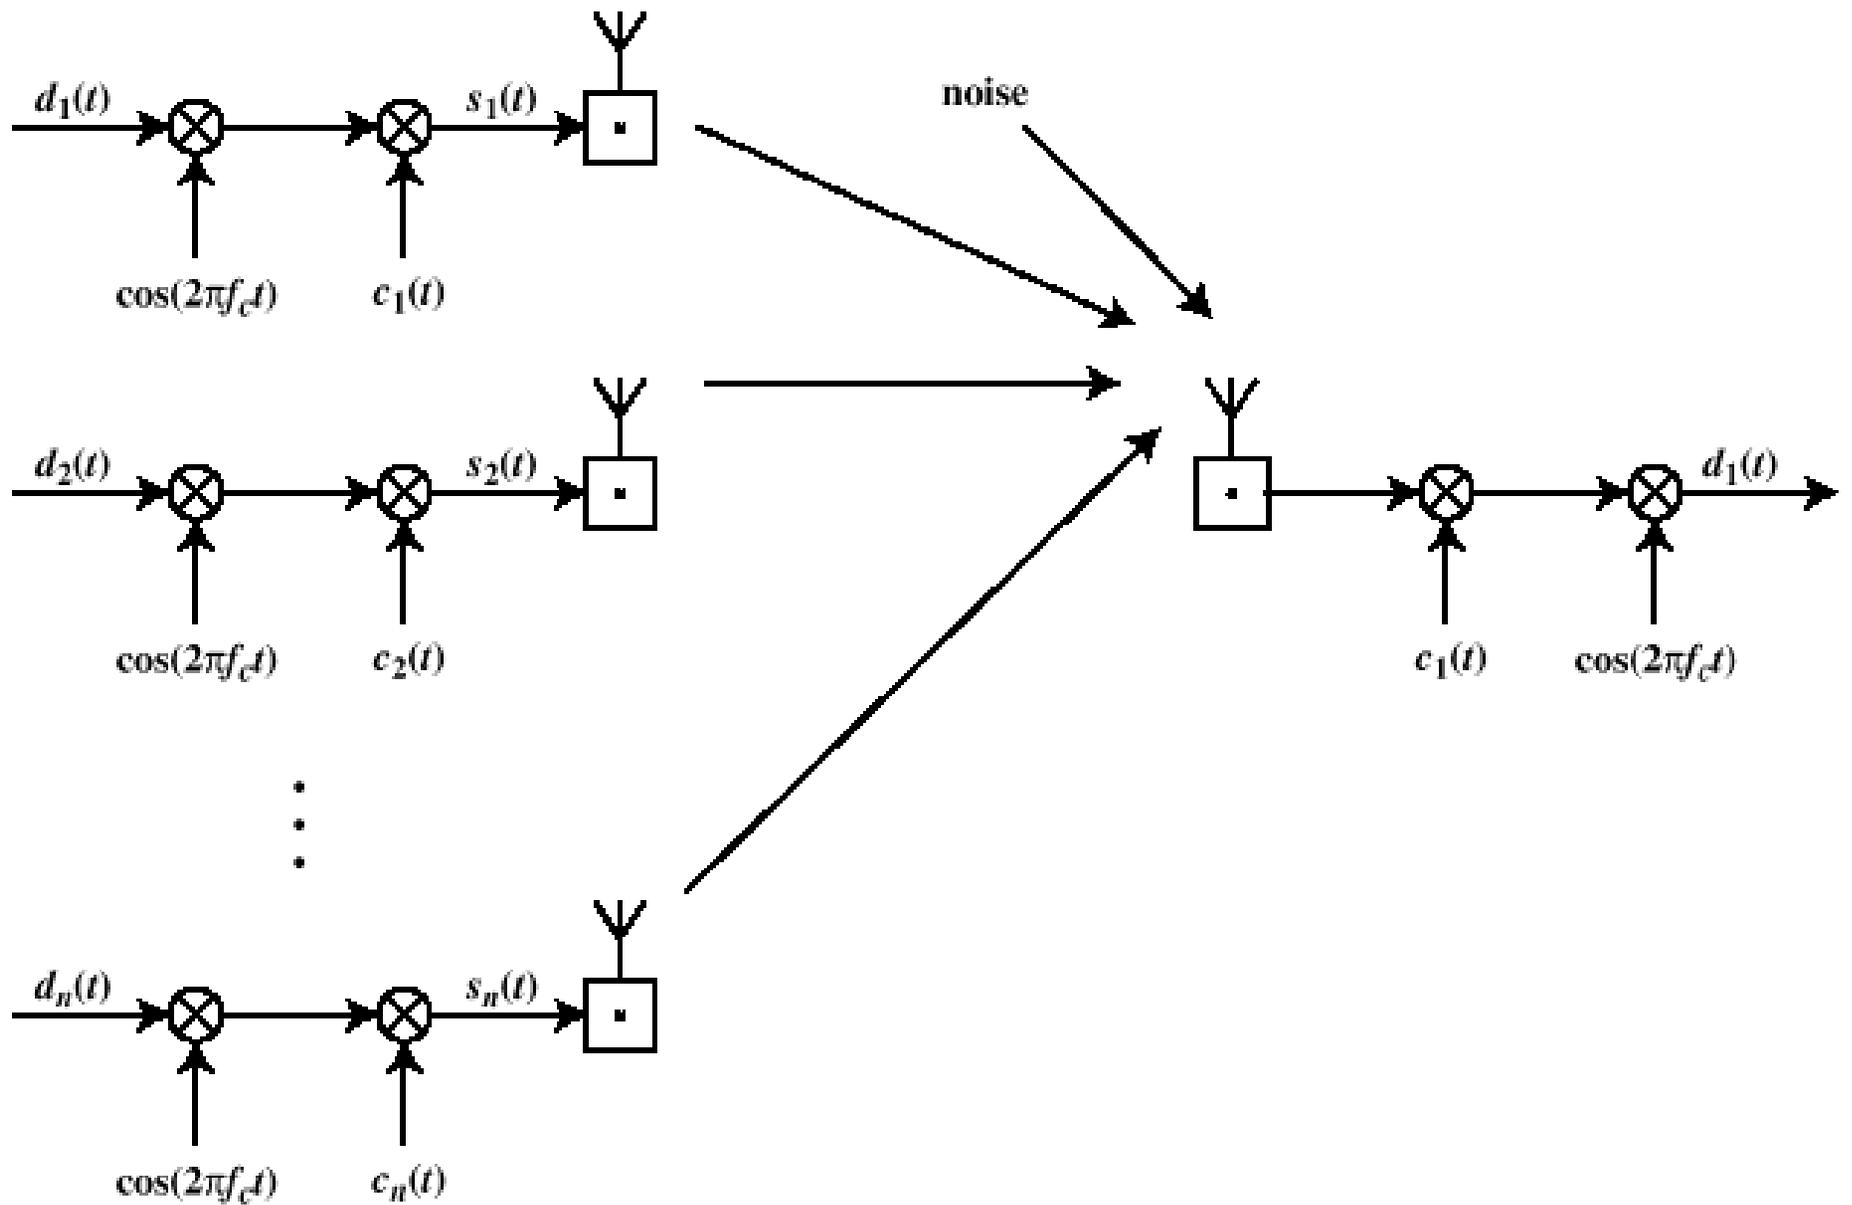

**Figure 7.11 CDMA in a DSSS Environment**

# Categories of Spreading Sequences

- ❑ Spreading Sequence Categories
  - o PN sequences
  - o Orthogonal codes
- ❑ For FHSS systems
  - o PN sequences most common
- ❑ For DSSS systems not employing CDMA
  - o PN sequences most common
- ❑ For DSSS CDMA systems
  - o PN sequences
  - o Orthogonal codes

# PN Sequences

- ❑ PN generator produces periodic sequence that appears to be random
- ❑ PN Sequences
  - o Generated by an algorithm using initial seed
  - o Sequence isn't statistically random but will pass many test of randomness
  - o Sequences referred to as pseudorandom numbers or pseudonoise sequences
  - o Unless algorithm and seed are known, the sequence is impractical to predict


# Important PN Properties

## □ Randomness

- o Uniform distribution
  - Balance property
  - Run property
- o Independence
- o Correlation property

## □ Unpredictability

# Linear Feedback Shift Register Implementation

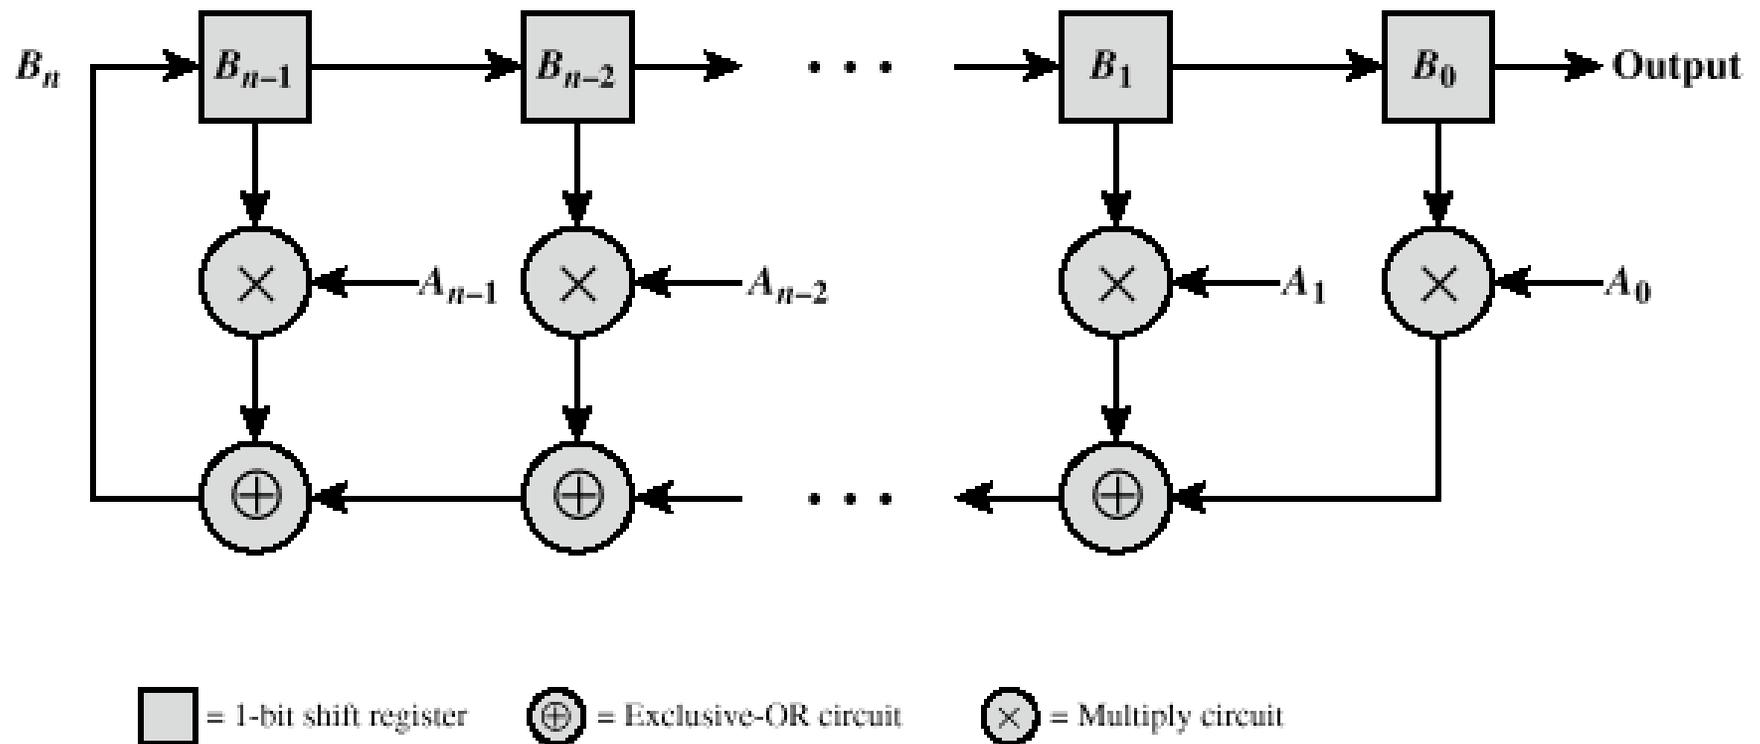

**Figure 7.12 Binary Linear Feedback Shift Register Sequence Generator**

# Properties of M-Sequences

## □ Property 1:

- o Has  $2^{n-1}$  ones and  $2^{n-1}-1$  zeros

## □ Property 2:

- o For a window of length  $n$  slid along output for  $N (=2^{n-1})$  shifts, each  $n$ -tuple appears once, except for the all zeros sequence

## □ Property 3:

- o Sequence contains one run of ones, length  $n$
- o One run of zeros, length  $n-1$
- o One run of ones and one run of zeros, length  $n-2$
- o Two runs of ones and two runs of zeros, length  $n-3$
- o  $2^{n-3}$  runs of ones and  $2^{n-3}$  runs of zeros, length 1

# Properties of M-Sequences

## □ Property 4:

- o The periodic autocorrelation of a  $\pm 1$  m-sequence is

$$R(\tau) = \begin{cases} 1 & \tau = 0, N, 2N, \dots \\ -\frac{1}{N} & \text{otherwise} \end{cases}$$

# Definitions

## ❑ Correlation

- o The concept of determining how much similarity one set of data has with another
- o Range between  $-1$  and  $1$ 
  - $1$  The second sequence matches the first sequence
  - $0$  There is no relation at all between the two sequences
  - $-1$  The two sequences are mirror images

## ❑ Cross correlation

- o The comparison between two sequences from different sources rather than a shifted copy of a sequence with itself


# Advantages of Cross Correlation

- ❑ The cross correlation between an m-sequence and noise is low
  - This property is useful to the receiver in filtering out noise
- ❑ The cross correlation between two different m-sequences is low
  - This property is useful for CDMA applications
  - Enables a receiver to discriminate among spread spectrum signals generated by different m-sequences

# Gold Sequences

- ❑ Gold sequences constructed by the XOR of two m-sequences with the same clocking
- ❑ Codes have well-defined cross correlation properties
- ❑ Only simple circuitry needed to generate large number of unique codes
- ❑ In following example (Figure 7.16a) two shift registers generate the two m-sequences and these are then bitwise XORed

# Gold Sequences

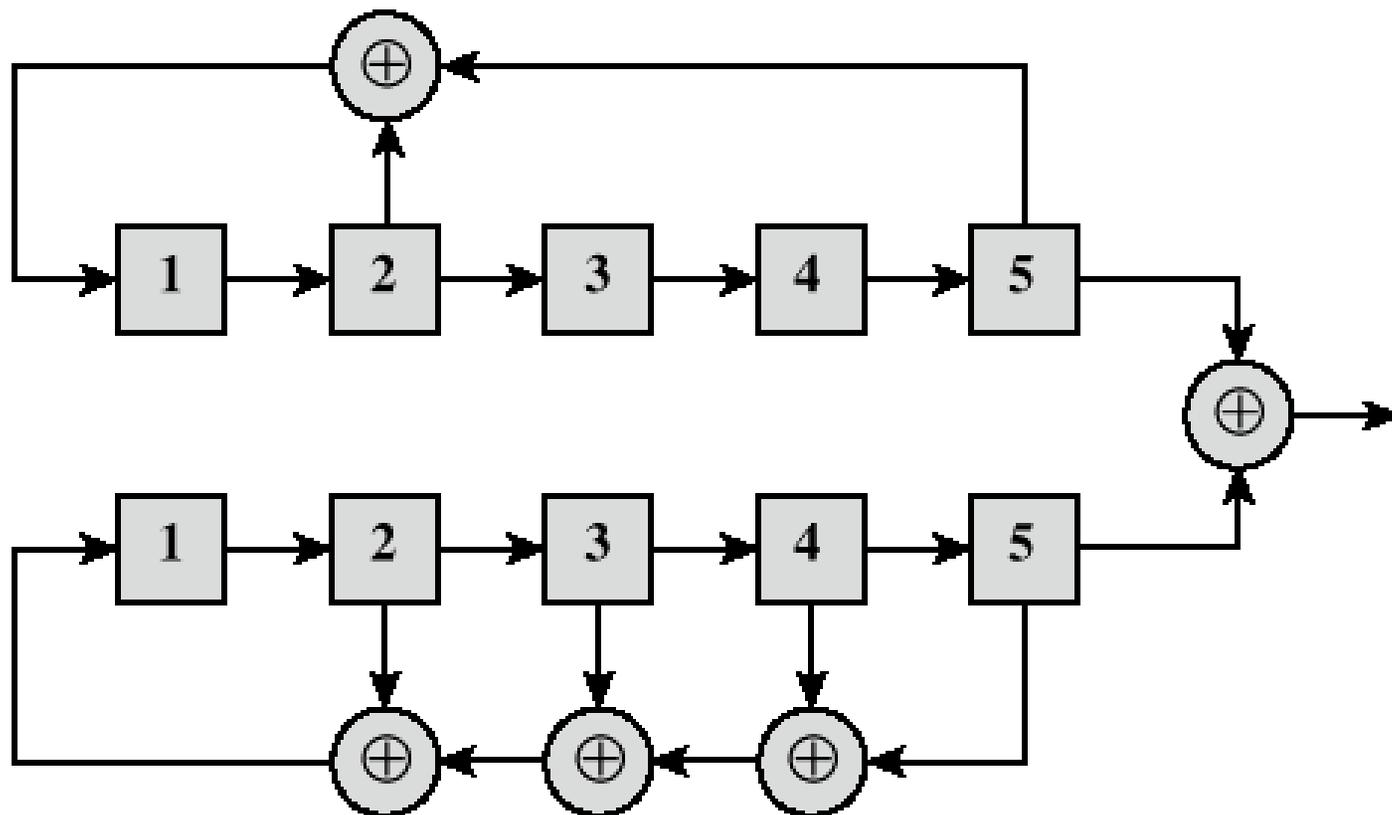

**(a) Shift-register implementation**

# Orthogonal Codes

## ❑ Orthogonal codes

- o All pairwise cross correlations are zero
- o Fixed- and variable-length codes used in CDMA systems
- o For CDMA application, each mobile user uses one sequence in the set as a spreading code
  - Provides zero cross correlation among all users

## ❑ Types

- o Walsh codes
- o Variable-Length Orthogonal codes

# Walsh Codes

□ Set of Walsh codes of length  $n$  consists of the  $n$  rows of an  $n \times n$  Walsh matrix:

$$W_1 = (0) \quad W_{2n} = \begin{pmatrix} W_n & W_n \\ W_n & \overline{W_n} \end{pmatrix}$$

- $n$  = dimension of the matrix
- o Every row is orthogonal to every other row and to the logical not of every other row
- o Requires tight synchronization
  - Cross correlation between different shifts of Walsh sequences is not zero

# Typical Multiple Spreading Approach

- ❑ Spread data rate by an orthogonal code (channelization code)
  - Provides mutual orthogonality among all users in the same cell
- ❑ Further spread result by a PN sequence (scrambling code)
  - Provides mutual randomness (low cross correlation) between users in different cells