



Aspectual Component Implementation

Examples

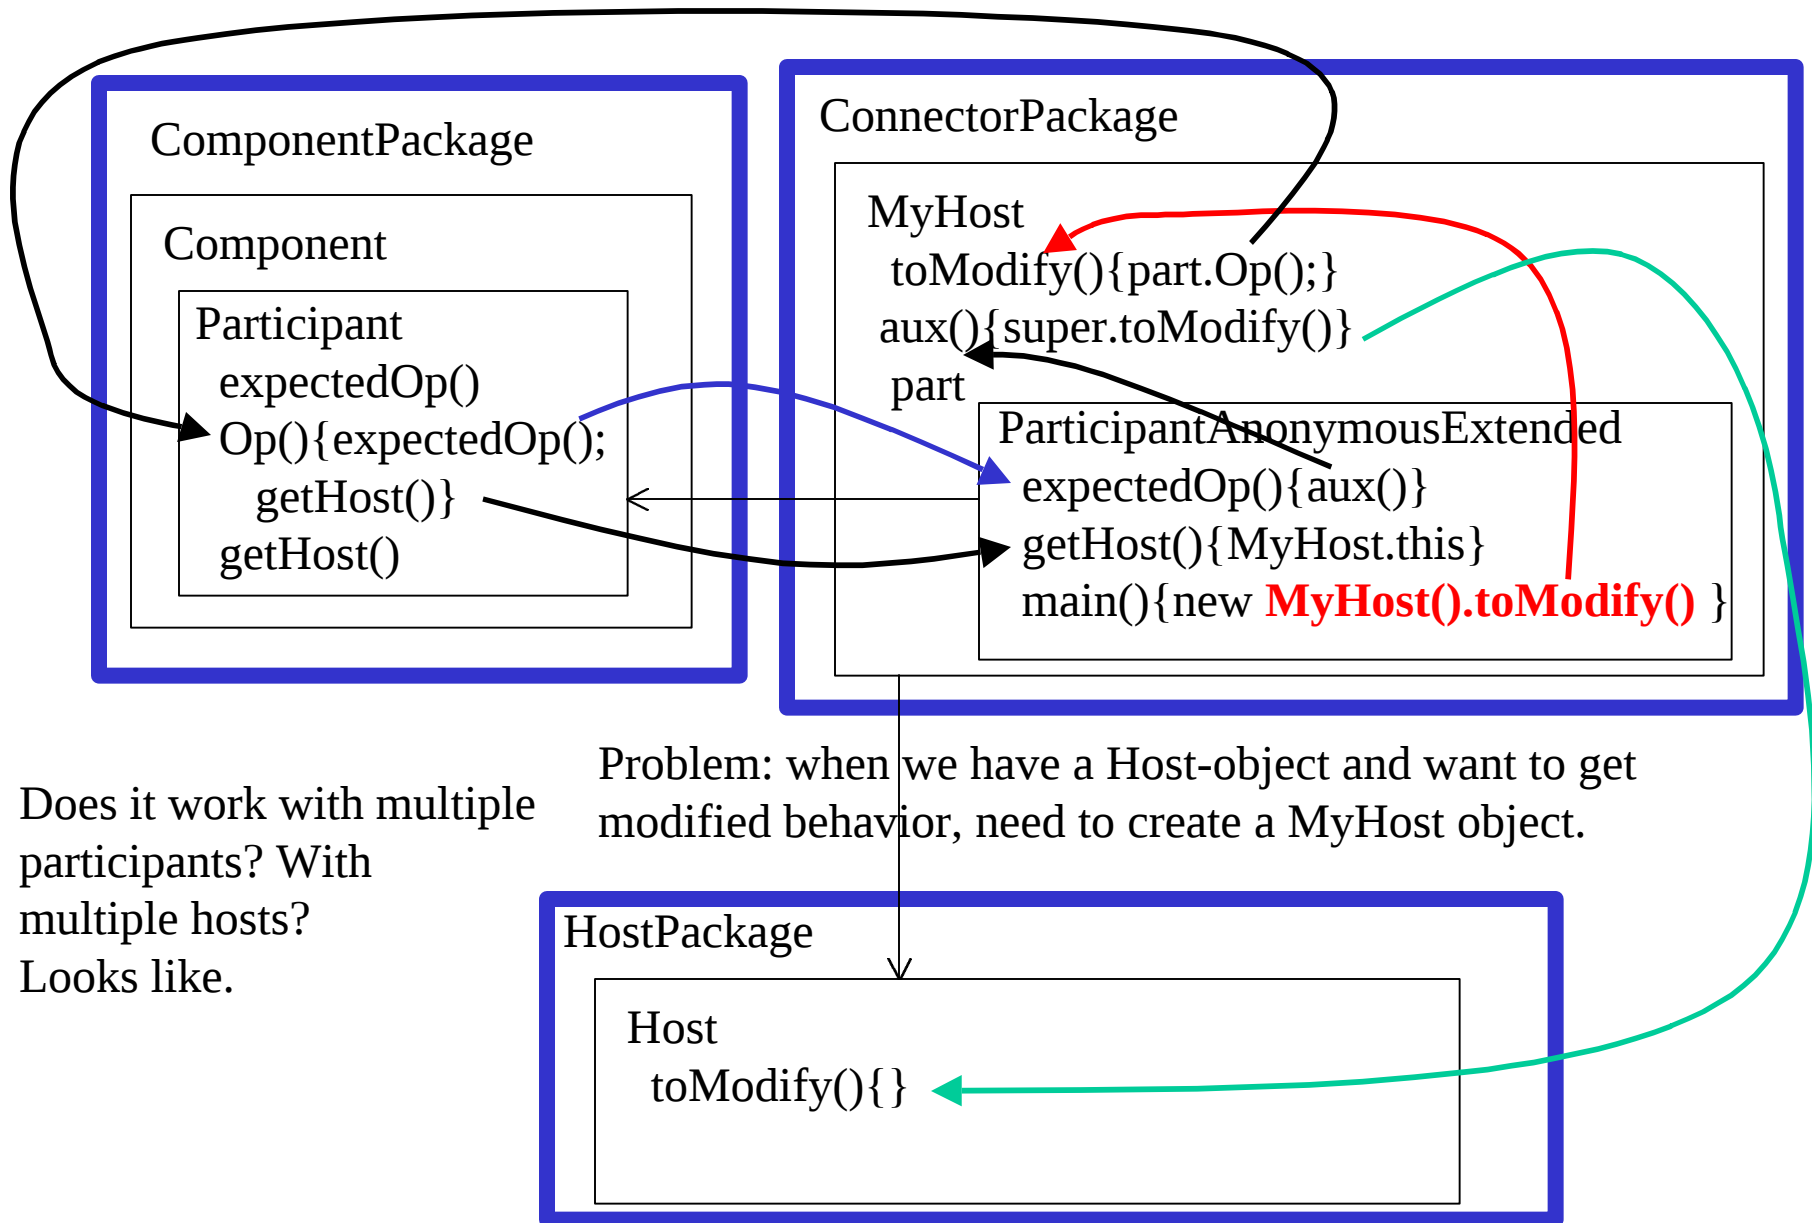

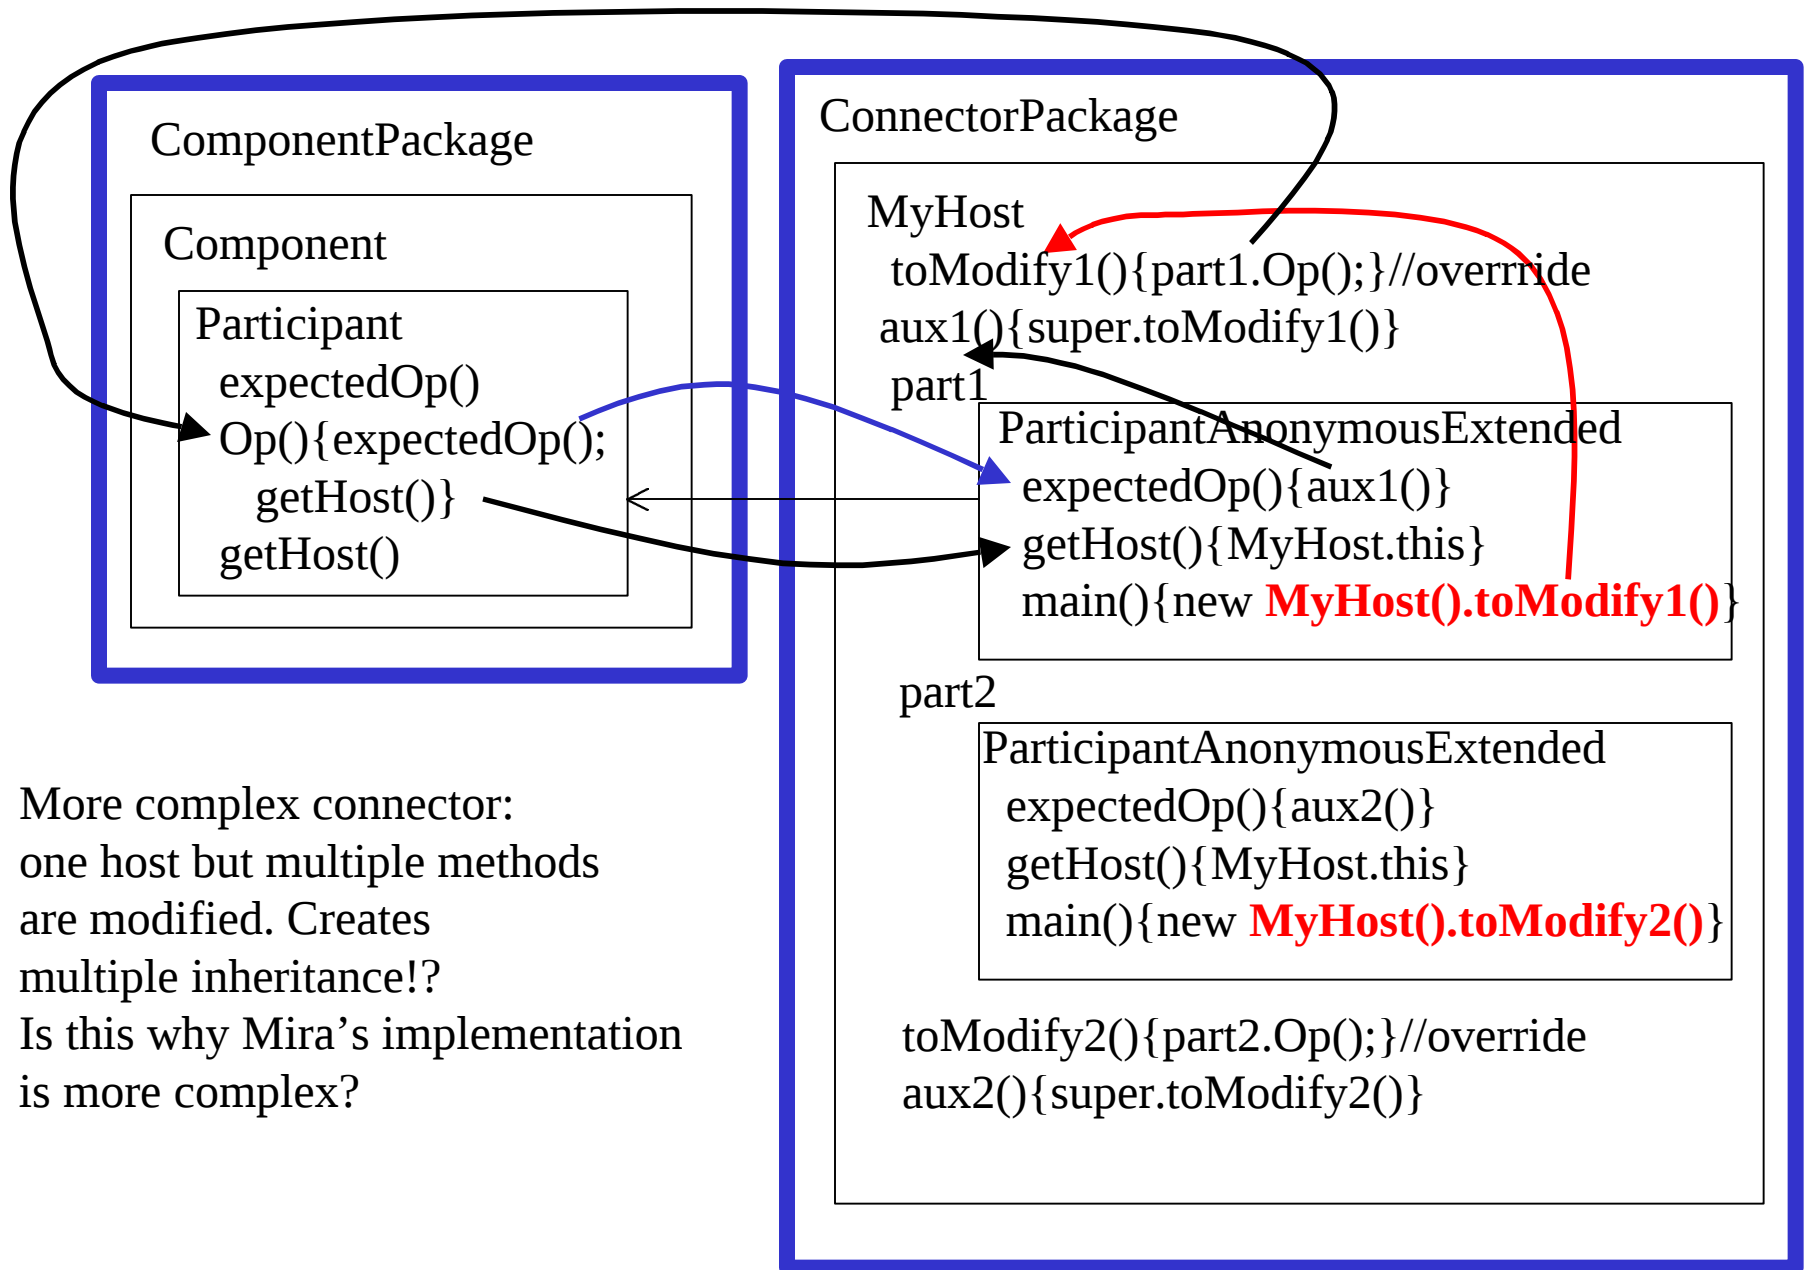

More complex connector:
one host but multiple methods
are modified. Creates
multiple inheritance!?
Is this why Mira's implementation
is more complex?